

MG

Tip Top Guide with
Stainless Steel




MG型トップガイド

Sloped frame tip top guide needless to bind the foot
(Glued-on type).

For spinning and casting rods.

足縛り不要の傾斜フレームトップ。

シーバス、投げ、船などの振出竿に対応

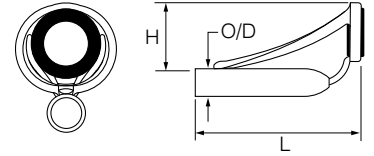

Size Chart

Ring Size	Pipe Size	L mm	H mm	O/D mm
8	-1.8	24.5	11.5	2.04
8	-2.0	24.5	11.5	2.24
8	-2.2	24.5	11.5	2.48
8	-2.4	24.5	11.5	2.68
8	-2.6	26.7	11.5	2.91
8	-2.8	26.7	11.5	3.11
8	-3.0	26.7	11.5	3.33
8	-3.2	30.0	11.5	3.53
8	-3.6	30.0	11.5	3.97
8	-4.0	30.0	11.5	4.60
8	-4.5	30.0	11.5	5.10
10	-2.0	24.5	13.3	2.24
10	-2.2	24.5	13.3	2.48
10	-2.4	24.5	13.3	2.68
10	-2.6	27.5	13.3	2.91
10	-2.8	27.5	13.3	3.11
10	-3.0	27.5	13.3	3.33
10	-3.2	30.3	13.3	3.53
10	-3.6	30.3	13.3	3.97
10	-4.0	30.3	13.3	4.60
10	-4.5	30.7	13.3	5.10
12	-2.6	29.6	14.0	2.91
12	-2.8	29.6	14.0	3.11
12	-3.0	29.6	14.0	3.33
12	-3.2	29.6	14.0	3.53
12	-3.6	30.5	14.0	3.97
12	-4.0	30.5	14.0	4.60
12	-4.5	30.5	15.0	5.10
12	-5.0	30.5	15.0	5.60

No.1 / 2

	PMGST	MGST
Frame Color	Polished Silver-White	Gunsmoke
Ring Material	SiC <u>SiC</u>	SiC <u>SiC</u>
Ring Type→ Ring & Pipe Size↓	LH	LH
8 - 1.8		
8 - 2.0		
8 - 2.2		
8 - 2.4		
8 - 2.6		
8 - 2.8		
8 - 3.0		
8 - 3.2		
8 - 3.6		
8 - 4.0		—
8 - 4.5		—
10 - 2.0		—
10 - 2.2		
10 - 2.4		
10 - 2.6		
10 - 2.8		
10 - 3.0		
10 - 3.2		
10 - 3.6		
10 - 4.0		
10 - 4.5	—	—
12 - 2.6		
12 - 2.8		
12 - 3.0		
12 - 3.2		
12 - 3.6		
12 - 4.0		
12 - 4.5		
12 - 5.0	—	—



● Deep Pressed Frame
深絞りフレーム

Example 表記例

- PMGST 8-1.8
- MGST 8-1.8
- CCMGAT 8-1.8
- MGOT 8-1.8

MG

Tip Top Guide with
Stainless Steel



No.2 / 2

	CCMGAT	BMGAT	MGAT	MGOT	BMGOT	
Frame Color	Frosted Silver-White	Black	Silver-White	Silver-White	Black	
Ring Material	ALCONITE 	ALCONITE 	ALCONITE 	"O" Ring	"O" Ring	
Ring Type →	LH	LH	LH	L	L	
Ring & Pipe Size ↓						
8 - 1.8		—				8 - 1.8
8 - 2.0						8 - 2.0
8 - 2.2						8 - 2.2
8 - 2.4						8 - 2.4
8 - 2.6						8 - 2.6
8 - 2.8						8 - 2.8
8 - 3.0						8 - 3.0
8 - 3.2						8 - 3.2
8 - 3.6						8 - 3.6
8 - 4.0		—				8 - 4.0
8 - 4.5		—		—	—	8 - 4.5
10 - 2.0		—		—	—	10 - 2.0
10 - 2.2						10 - 2.2
10 - 2.4						10 - 2.4
10 - 2.6						10 - 2.6
10 - 2.8						10 - 2.8
10 - 3.0						10 - 3.0
10 - 3.2						10 - 3.2
10 - 3.6						10 - 3.6
10 - 4.0						10 - 4.0
10 - 4.5	—	—	—	—	—	10 - 4.5
12 - 2.6						12 - 2.6
12 - 2.8						12 - 2.8
12 - 3.0						12 - 3.0
12 - 3.2						12 - 3.2
12 - 3.6						12 - 3.6
12 - 4.0						12 - 4.0
12 - 4.5						12 - 4.5
12 - 5.0	—	—	—	—	—	12 - 5.0

