

"THE RODSMITH QUAD ROD DRYER"

PROFESSIONAL 4 STATION ROD DRYING MACHINE


PACIFIC BAY INTERNATIONAL, INC.
RDM-4



FOR THE SERIOUS CUSTOM ROD BUILDER

- Four Self centering chucks
- Four 6 RPM finish and drying motors with individual on/off switches
- Holds rods up to 1 1/2 inches in diameter
- Wall mounts included to free up valuable table space

"THE RODSMITH QUAD ROD DRYER" by PACIFIC BAY

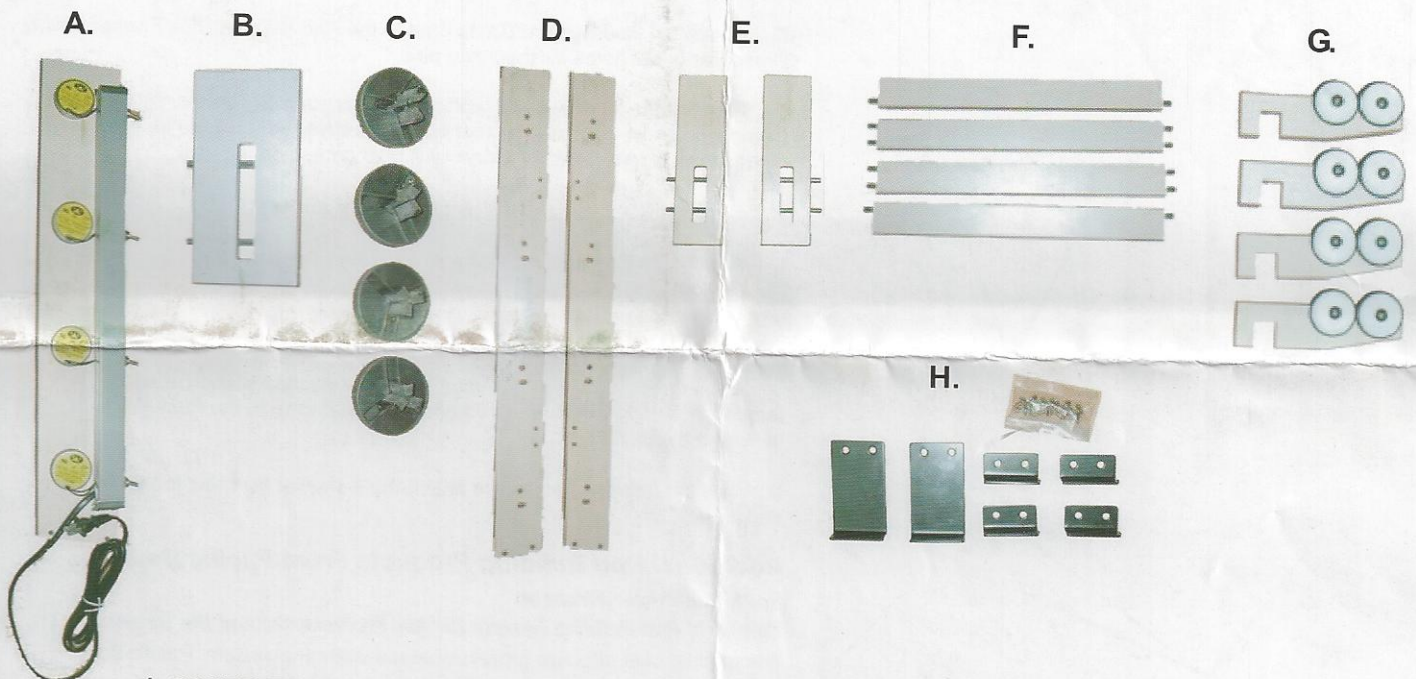

1. CONTENTS

Please check contents of this package immediately after opening. It should contain the following parts and assemblies:

- A. Motor & Chuck Stand assembly (1 pc) - Includes 4 motors, switch bar with 4 switches and a power cord
- B. Motor Stand Base (1 pc)
- C. Chucks with fastening screws (4 pcs)
- D. Rod Support Side Frames (2 pcs)
- E. Rod Support Base with pins (2 pcs)
- F. Rod Support Cross Bars (4 pcs) - 2 with 1 pin on each end and 2 with 2 pins on each end
- G. Rod Support Rollers (4 pcs)
- H. Wall hanging brackets (2 large pcs for the Motor & Chuck Stand and 4 small pcs for the Rod Supports) with screws

CAUTION:






1. Should not be operated by children.
2. Not to be used by the physically or mentally impaired unless supervised by a responsible party for their safety.
3. If the power cord is damaged do not attempt to repair by yourself. Please have repaired by a certified electrician.

Pacific Bay International, Inc. Email: info@fishpacbay.com Web: www.fishpacbay.com

Pacific Bay International

RDM-4 RODSMITH QUAD ROD DRYER

2. ASSEMBLY AND SETUP OF "THE RODSMITH QUAD ROD DRYER"

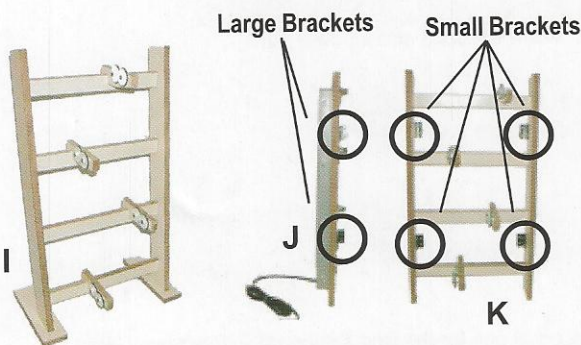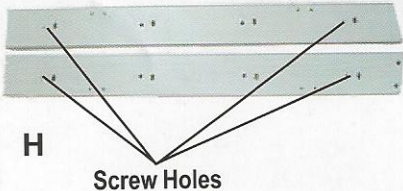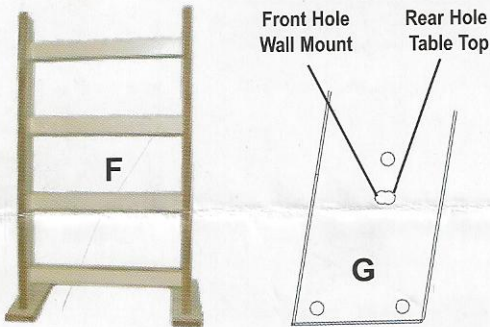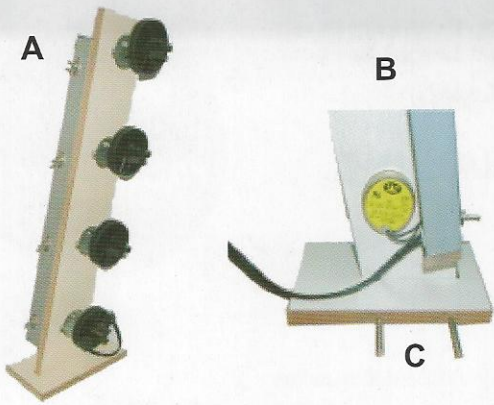

Completed Quad Rod Dryer

A. Attach the 4 chucks onto the motor shafts by aligning the screws on the chucks with the holes in the motor shafts and tighten the screws for a secure fit.

B. Insert the Motor & Chuck Stand into the Motor Stand Base with the power cord on the bottom and the power switches facing you. The stand should be leaning away from you.

C. Insert the two metal pins through the Motor Stand Base and the Motor & Chuck Stand to ensure they are joined securely.

D. Insert each Rod Support Side Frame into a Rod Support Base. When placed side by side the Rod Support Side Frames should lean in the same direction.

E. Insert the rod pins through all pieces to ensure they are joined together securely.

F. Attach the Rod Support Cross Bars to the Rod Support Side Frames. Each Cross Bar has 2 holes for mounting pins.

G. Please note there are two bottom holes for each Cross Bar. With the unit facing away from you, use the rear hole if the dryer will be used as a table top dryer. Use the front hole if the dryer will be mounted on the wall.

H. Tighten all screws to make certain all parts are tight.

I. Attach one Rod Support Roller to each Rod Support Cross Bar in the desired location.

3. WALL MOUNT ASSEMBLY INSTRUCTIONS

J. If the unit is to be wall mounted, use the furnished screws to attach the larger brackets to the Motor & Chuck Stand as shown in the illustration indicated by the circles.


K. Use the furnished screws to attach the 4 smaller brackets to the rod supports.

Additional Rod Building Products From Pacific Bay:

RodSmith Power Wrapper:

Complete Rod Building System for the Professional and the Beginner

The original cost effective professional rod wrapping system. Pacific Bay's RodSmith Power Wrapper continues to be the most popular rod wrapper in the market today.

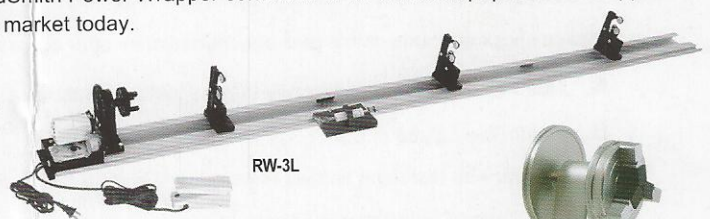

RodSmith Wrapper Accessory:

Lathe Quality RodSmith Deluxe Chuck

Upgrade your original RodSmith Power Wrapper today! Additional set of jaw attachments are included for accommodating larger o.d. blanks and cork grips.



RW-1/DX-CHK-SPTS

For free component catalog and rod building instructions, write to:



Pacific Bay International, Inc.

165 Business Park Loop, Sequim, WA 98382

Tel: 360-683-2080 Fax: 360-683-2234

Email: info@fishpacbay.com Web: www.fishpacbay.com

042308